

Force⁴

Tile & Grout System



Quick Reference Guide



If tile and grout surface has been sealed and/or waxed, a stripper must be used to remove contaminants from tile surface and grout lines prior to application of the Force4 Tile & Grout System.

Si el azulejo y lechada ha sido dad cera, un desmoldador debe ser utilizado para quitar toda la cera antes de la aplicación de los productos Force4.

1 Assault™ - Tile & Grout Cleaner & Pretreatment / Limpiador de Azulejo y Lechada y Preparación

One half gallon of Assault mixed at a ratio of 1:8 parts water will clean approximately 500 s/f of tiled surface. The diluted mix is sprayed or mopped onto the surface and allowed to dwell without drying for 15 minutes. After adequate dwell time, surface should be brushed to complete the break-up of contaminants and slurry extracted with a wet vacuum.

Un medio galón de Assault mezclado con ocho galones de agua limpiará aproximadamente 500 piés cuadrados de azulejo y lechada. Aplique la solución con una fregóna y deje penetrar sin desecar durante 15 minutos. Después de 15 minutos, agite la superficie con una cepillo para raspar. Puede utilizar un cepillo o una almohadilla dependiendo de sus resultados deseados. Se recomienda usar una aspiradora de agua para remover todos los restos de suciedad.

2 Advance™ - Grout Restorer & Cleaner / Restaurador y Limpiador de la Lechada

One half gallon of Advance mixed at a ratio of 1:8 parts water will clean approximately 500 s/f of tiled surface. The diluted mix is sprayed or mopped onto the surface and allowed to dwell without drying for 15 minutes. After adequate dwell time, surface should be brushed to complete the break-up of contaminants and slurry extracted with a wet vacuum.

Un medio galón de Advance mezclado con ocho galones de agua limpiará aproximadamente 500 piés cuadrados de azulejo y lechada. Aplique la solución con una fregóna y deje penetrar sin desecar durante 15 minutos. Después de 15 minutos, agite la superficie con una cepillo para raspar. Puede utilizar un cepillo o una almohadilla dependiendo de sus resultados deseados. Se recomienda usar una aspiradora de agua para remover todos los restos de suciedad.

3 Revive™ - Tile Restorer & Cleaner / Restaurador y Limpiador de Azulejo

One half gallon of Revive mixed at a ratio of 1:8 parts water will clean approximately 500 s/f of tiled surface. The diluted mix is sprayed or mopped onto the surface and allowed to dwell without drying for 15 minutes. After adequate dwell time, should can be brushed to complete the break-up of contaminants and slurry extracted with a wet vacuum. You may use a brush or pad, dependent upon your desired results.

Un medio galón de Revive mezclado con ocho galones de agua limpiará aproximadamente 500 piés cuadrados de azulejo y lechada. Aplique la solución con una fregóna y deje penetrar sin desecar durante 15 minutos. Después de 15 minutos, agite la superficie con una cepillo para raspar. Puede utilizar un cepillo o una almohadilla dependiendo de sus resultados deseados. Se recomienda usar una aspiradora de agua para remover todos los restos de suciedad.

4 Shield™ - Clear Penetrating Slip-Resistant Sealer / Resistencia del Resbalón y Sellador

Tile & grout must be free of any type of coating, sealer or wax, and must be clean and free from all grease, dirt, and grime, etc. before Shield is applied. Apply Shield with a pump-up sprayer. Apply heavy mist. Let Shield soak tile & grout for 5 minutes. Do not let it dry out. Lightly scrub surface with a brush or pad. Test surface with foot pressure to determine adequate increase in COF. If necessary, add more Shield. Let tile & grout continue to soak for 5-7 minutes. Use pump sprayer to mist water on surface to keep it from drying out during this time. Let the floor dry naturally. Drying may produce a light residue which can be removed with damp mop water and/or neutral cleaner.

El azulejo y lechada debe ser libre de cualquier tipo de capa, del sellador, o de la cera. También deben ser libre de toda grasa, la tierra, la mugre, etc. antes de aplicar Shield. Aplique Shield con un atomizador de bomba-arriba. Aplique la niebla pesada. Permite que Shield empape la superficie durante 5 minutos. No permite desecar. Friegue suavemente con un cepillo o almohadilla. Pruebe superficie con la presión de pie para determinar aumento adecuado en el coeficiente de fricción. Si es necesario, pone mas Shield. Permita azulejo y lechada contunúa empapar durante 5-7 minutos. Utilice atomizador de bomba al agua para poner agua en la superficie para que no desequie. Permite que la superficie seque naturalmente. Secando puede producir un residuo ligero que puede ser quitado con un fregón y/o limpiador neutral.

For questions or product support, please contact the Triple S Member from whom you purchased this product, www.triple-s.com, 800-323-2251.



Tile & Grout System

Recommended Maintenance and Cleaners

***PLEASE NOTE:** A tile & grout surface treated with **Force4** will become dirty in appearance if proper cleaning and maintenance techniques are not followed. The good news is that any soiling build-up will be topical and can be easily removed since tile and grout have been sealed. Neutral cleaners should be used on a daily basis and a higher pH degreaser used to spot clean spills / stains and traffic soiling patterns as necessary. Acids and oil based cleaners should never be used. Acids can cause damage to tile & grout and oil based cleaners will leave a residue on the surface. Use of either of these types of cleaners can reduce the slip-resistant and stain resistant qualities of the **Force4** application.

Performance Outcome Expectation

The primary concept behind stain-resistant sealing is to provide time for the materials / liquids spilled onto the surface to dissipate or be removed prior to deep penetration into the tile & grout pores. This penetration into pores of both tile & grout are what ultimately results in staining that cannot be removed by standard cleaning products and methods. In addition, sealing the tile & grout helps to eliminate polymerization or sediment build-up that takes root within pores and cannot be removed easily.


If daily & periodic deep cleaning procedures shown above are followed, then floor should remain free of staining & polymerization. The result will be a cleaner and more sanitary tile & grout surface that is easy to maintain.

Strobe Neutral No Rinse Cleaner (*included in Force4 Tile & Grout Kit*)

Designed for use as a floor cleaner, this low foam, concentrated product is an effective cleaner on high gloss floor finishes. Used daily, it will provide longer wear of floor finishes and seals. Formulated to deodorize rooms as it gently cleans. No rinsing required, saving time and labor.


For Daily & General Maintenance:

- Remove gross soils (*i.e., labels, gum*). Dust mop floor daily
- For daily use, and light soils, dilute 1:32 to 1:20 (*4-6 ounces per gallon of water*)
- For moderate to heavy soils, dilute 1:16 to 1:10 (*8-12 ounces per gallon of water*)
- Bucket solution must be changed a minimum of every 2,000 square feet to prevent re-application of sediment to the surface.
- High traffic areas, such as entrances, require a bucket change every 1,000 square feet due to heavy buildup of sediment in these areas.
- Clean with mop or auto scrubber to remove soils and spills, picking up solution as you clean. Allow to dry. No need to rinse, when cleaning with a mop and bucket, replace solution when it becomes visible dirty.

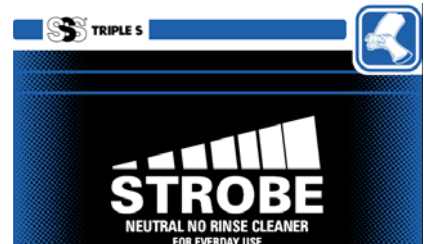

Pleasant Neutra Shine Disinfectant (*NOT included in Force4 Tile & Grout Kit*)

For daily cleaning and disinfecting use Pleasant Neutra Shine. This quat-based disinfectant is effective against bacteria including salmonella choleraesuis, pseudomonas aeruginosa and staphylococcus aureus on hard surfaces. Also effective against the HIV-1 (AIDS) virus. Ideal for use in virtually all institutional or commercial sanitation programs for the control of disease and odor causing germs. Neutral pH - will not dull or remove detergent resistant floor finishes.

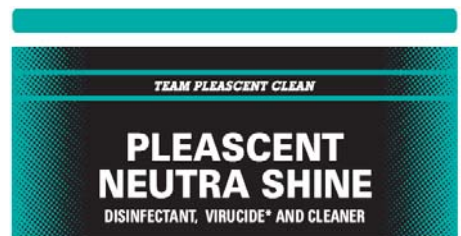

For more information about these and other fine quality cleaning products, contact your Triple S Member-Dealer, www.triple-s.com, 800-323-2251.